

optimail 30 Teleset Re-Crediting Instructions



Overview


Teleset re-crediting is the loading of postage from your FP Teleset account onto your franking machine. This involves the machine dialling up to the FP Teleset server via your analogue telephone line. The franking machine then requests the amount you have specified and transfers the funds securely to your **optimail 30** franking machine.


Re-crediting requirements

As mentioned above, you require an analogue telephone line.
You must have funds available on your FP Teleset account ready for downloading.
You must download your postage funds in £10 increments. i.e. £10, £20, £50, £100.
The minimum amount for download is £10.
The maximum amount for download is £9990.

Loading postage

The optimail 30 must be connected to the telephone line for the duration of the loading process. Make sure that the dialling parameters for the modem are correctly set up.

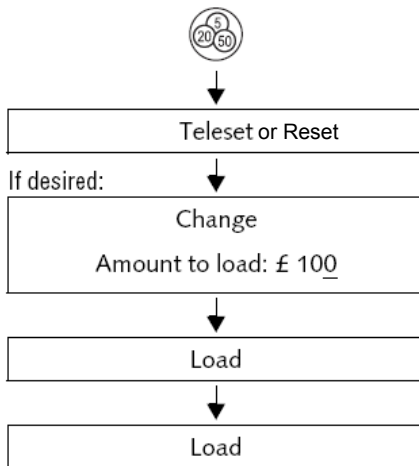

- Press the  key.
- Select TELESET to call up the loading procedure.
- Accept the amount to be loaded
or
use CHANGE to open the menu for the amount to be loaded. Type the desired amount.
- Confirm with LOAD.

To load the displayed amount:

- Use LOAD to establish the connection to the Teleset Data Centre.

Loading continues automatically. You can monitor the progress in the display. Please stand by. Data exchange takes some time.

The new residual amount is indicated when loading ends.



Use REPORT to view and print the loading report.